

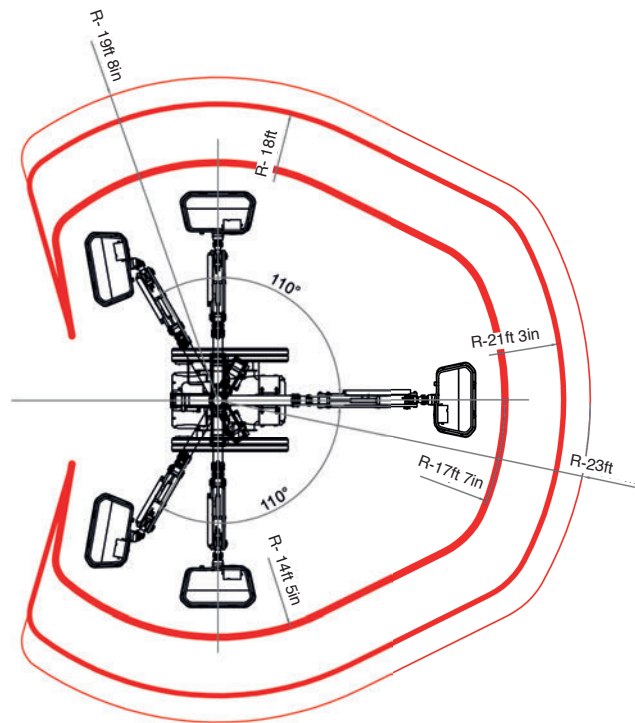
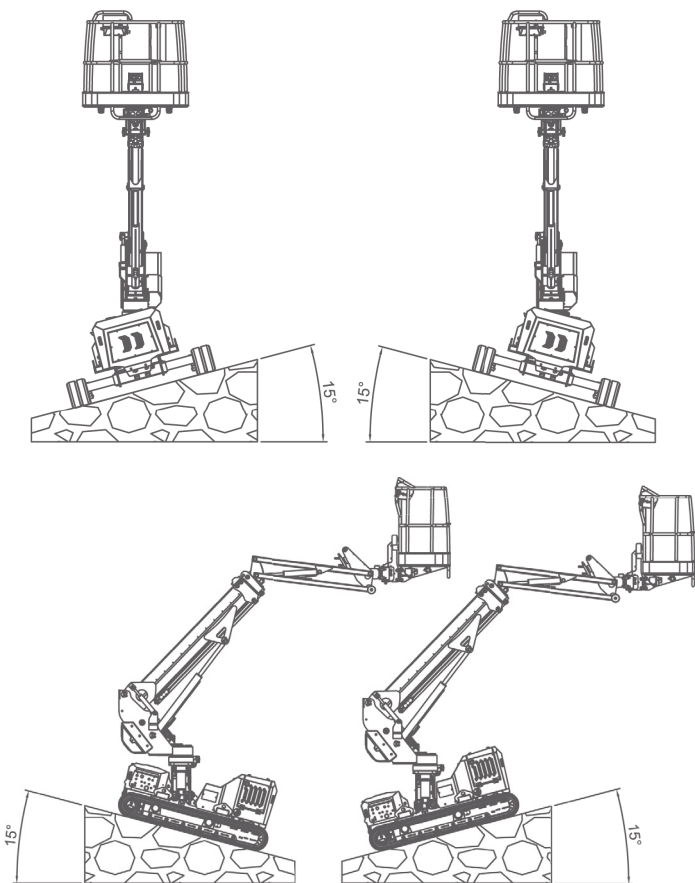


JIBBI
40 BL-W
EVO

40ft	507 lbs.	19.2 hp	$\pm 15^\circ$	1.5 mph	$\pm 15^\circ$
MAX W.H.	CAPACITY	POWER	LONG. LEVEL	SPEED	LATER. LEVEL

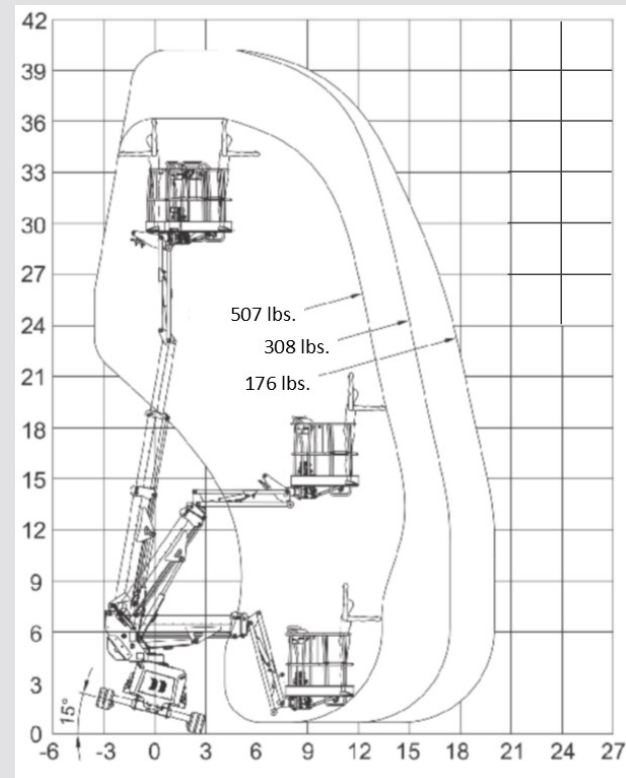

We reserve the right to make alterations to make alterations.

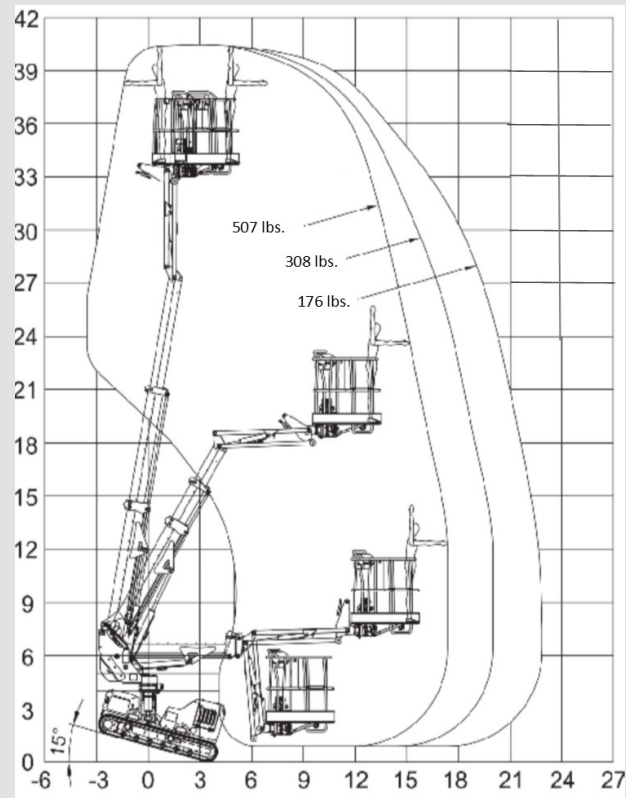

Toll free: 866-358-708

www.ruthmannreachmaster.com

JIBBI
40 BL-W EVO

PATENT PENDING




COMPACT ALL-TERRAIN BOOM



JIBBI 40 BL-W EVO



Cable remote control by AUTECH

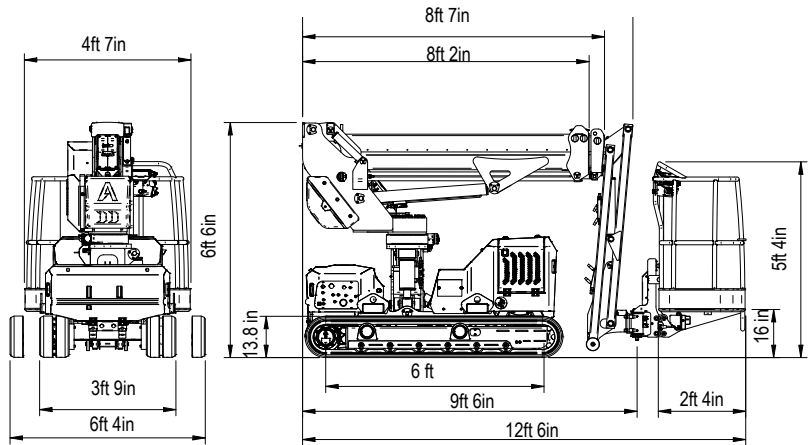

Features

- Yanmar Diesel Engine, 3 Cylinders - (14,1kW - 19,2 HP)
- 240° Turret rotation
- Basket rotation - +/- 70°
- Integrated Drive System (using single joystick)

Ultrasonic
Anti-collision
System

Automatic & Dynamic Levelling
Pro-Active Levelling



JIBBI 40 BL-W EVO



Technical data

40ft	Max working height
33ft 8in	Max platform height
26ft 2in	Moving height
23ft	Max outreach (load 176 lbs.)
17ft 7in	Max outreach (load 507 lbs.)
+/- 110°	Rotation angle
4ft 7in x 2ft 4in	Basket size
+/- 70°	Basket rotation angle
507 lbs.	Max basket capacity
12ft 6in (9ft 6in)	Length in stowed (with detached basket)
3ft 9in	Min width in stowed position
6ft 4in	Max working width
6ft 6in	Min height in stowed position
+/- 15°	Longitudinal leveling
+/- 15°	Lateral leveling
25°	Max gradeability
25°	Max side gradeability
1.55 mph	Drive speed (fast)
.19 mph	Slow speed

Weights

3,86 kN/m2	Ground pressure
6283 lbs	Total weight

Power

14 kW - 19,2 Hp 3TNM68 -AS Yanmar engine (diesel)

Options

Standard

- Cable remote control
- Yanmar Diesel Engine

- Electric pump 220V-2,2KW / 50Hz (Weight + 66 lbs.)
- Wireless remote control
- Winch kit 440 lbs.
- Non-marking tracks
- Arctic lubricant for cold climate



Compact dimensions
Removable basket

