

Winlet 915

Off-road model with great stability, extra reach and a front with horizontal hydraulic side shift.

⚙ MAX LIFTING HEIGHT: 11 FT 4 IN

⚙ WIDTH: 2 FT 9 IN

⚙ MAX LIFTING CAPACITY: 915 LB

⚙ HYDRAULIC SIDESHIFT: 3 IN

Are you looking for an off-road Winlet glass manipulator with extra lifting height and impressive lifting capacity?

Built to operate on outdoor terrain and extremely stable!



Winlet 915 - TL version is equipped with extra wide steering and traction wheels making it extremely stable and ideal for outdoor installations.

KEY ADVANTAGES

- Powerful front wheel drive
- Electromagnetic brakes
- Integrated safe & reliable 2 circuit vacuum system
- Ecomatic battery saving system
- Intelligent overload monitoring system
- Easy maneuvering with ergonomic operating lever
- 100% linear movements of the front
- Hydraulic linear movements controlled at the front
- Integrated lifting point for lifting the Winlet by crane
- 6 integrated lashing fittings for safe transport
- Weather resistant design

Winlet



CHOOSE BETWEEN THE MULTI FUNCTIONAL CONTROLLER
OR PROPORTIONAL CONTROLLER



Multi Function Controller

Allows controlling of more hydraulic functions at a time and variable speed.

Operator can adjust speed at 3 levels:
100 % - 50 % - 10 %.



Proportional Controller

Traditional Winlet controls, where you use one function at a time and is fully proportionally controlled.

Winlet 915


TECHNICAL SPECIFICATIONS*

Winlet

LIFTING CAPACITY	915 LB	TILT FUNCTION	BACK: 43° FORTH: 98°
MAX LOAD ARM OUT/IN	286 LB / 915 LB	ROTATION	2 X 180 DEGREES
MAX SIDE MOUNTED LOAD	440 LB	SUCTION CUPS	4 X 12 IN (14 IN / 16 IN)*
TOTAL LENGTH	6 FT 4 IN	FRONT WHEEL DRIVE	1200W
TOTAL WIDTH	2 FT 9 IN	24v AC transaxle	
Single mounted tires		BATTERIES	2X90 AH
TOTAL WEIGHT	1,995 LB	OPERATING HOURS	12 HOURS
LIFTING HEIGHT	10 FT 2 IN	On fully charged batteries	
Vertical cups, center of lifting yoke		CHARGING TIME	8-10 HOURS
EXTENSION MIN/MAX	1 FT 5 IN / 4 FT 9 IN	SUITABLE FOR OUTDOOR USE	YES
Front bumper to suction cup		Water resistant	
LIFTING HEIGHT MIN/MAX	0 / 3 FT 5 IN	INTEGRATED LIFTING EYE	YES
Horizontal cups down		For lifting of the Winlet	
LIFTING HEIGHT MIN/MAX	8 FT 8 IN / 11 FT 4 IN		
Horizontal cups up			

*Optional

WINLET 915 MAX. LOAD/REACH lb.

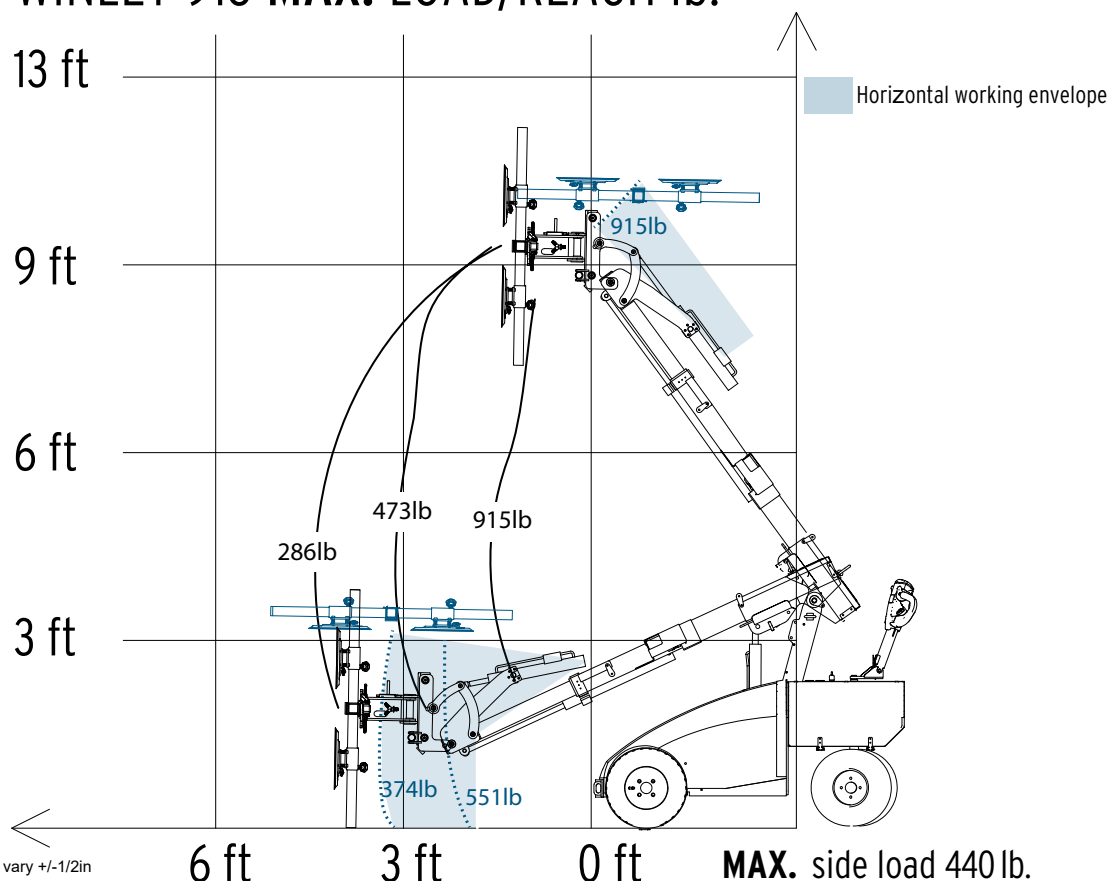

*The dimensions are indicative and may vary +/- 1/2in








www.winletusa.com

We reserve the right to alterations.

Toll free: 866-358-7088

Winlet 915

DIMENSIONS*

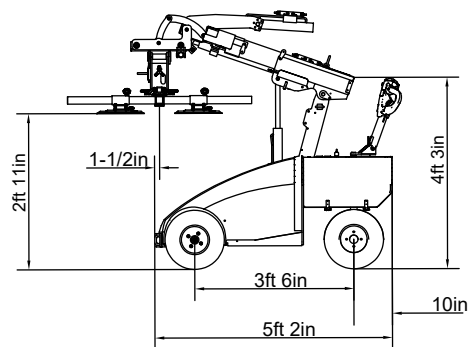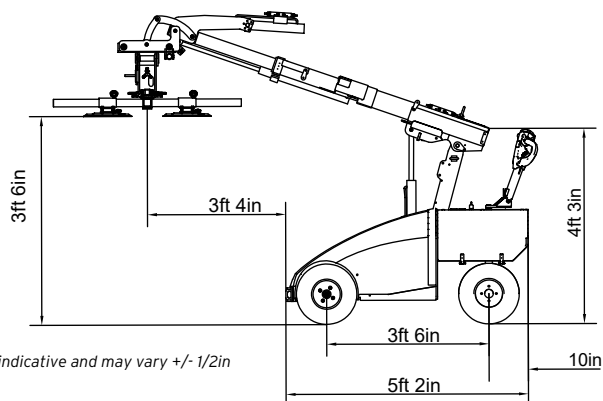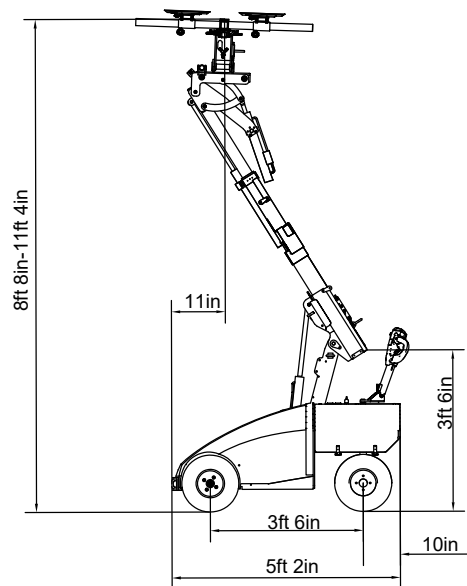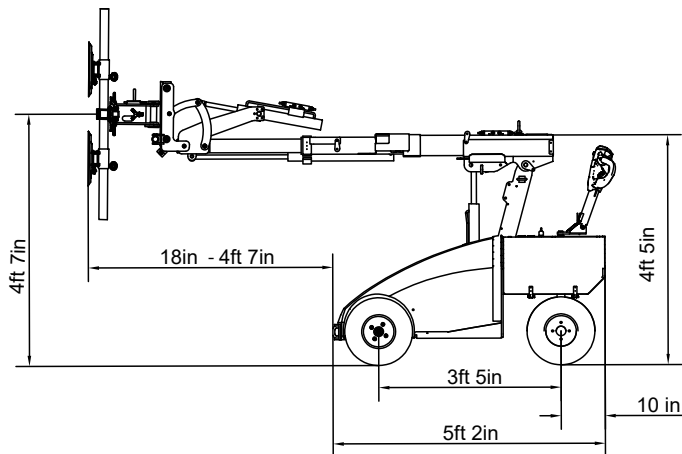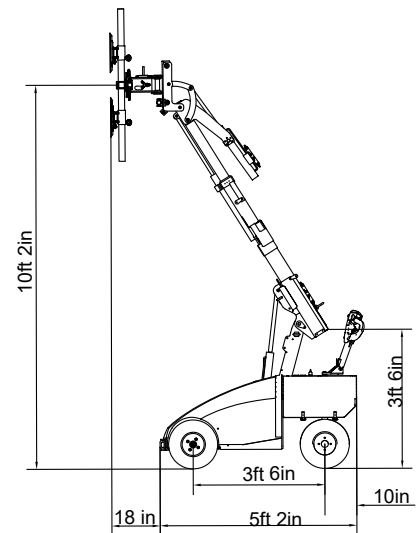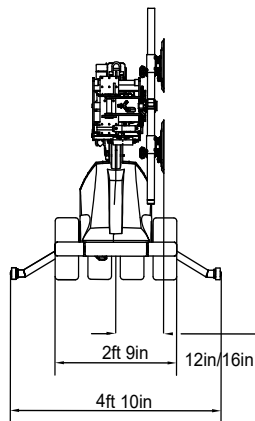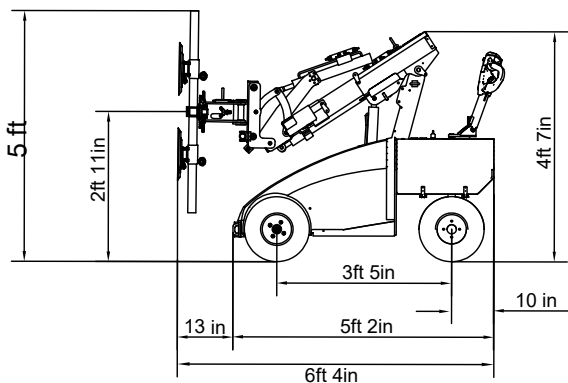

*The dimensions are indicative and may vary +/- 1/2in

*

www.winletusa.com

We reserve the right to alterations.

Toll free: 866-358-7088