

**B39
BLUELIFT**

Bluelift B39

The Bluelift B39 is an ultra-compact entry level unit in the extensive Bluelift series, offering 39 ft. vertical reach and 21 ft. horizontal reach, and a choice of power between either the standard Honda gas engine, Hatz diesel or Lithium Battery power. The Bluelift B39 is easy to transport, operate and most importantly your safest solution when working temporarily at height.

With its 2 ft 6 in width the Bluelift B39 will enter through any single in- or outdoor access point, and its non-marking tracks will leave no smear marks on its way. This makes the Bluelift B39 an excellent choice for work applications with limited height, but severe access and weight restrictions. While the combustion engine models come standard with a 110v emergency power system, they are limited to outdoor applications. The Lithium battery version, however, is equally at home in- as outdoor with a full work day operation range and ability to charge while in use from a standard 110v/15-amp outlet.


Time to retire tall ladders or time-consuming scaffold solutions and change to the Bluelift B39

Model

B39

Working height	39ft
Basket height	33ft
Max outreach	21ft
Basket load	440lbs
Basket dims	4ft7 ³ / ₄ in x 2ft5 ¹ / ₄ in
Basket rotation (opt)	+/-90°
Turret rotation	360°
Height	6ft6 ³ / ₄ in
Length (w/o basket)	11ft1 ³ / ₄ in
Length (w/ basket)	13ft7in
Width (w/o basket)	2ft6 ³ / ₄ in
Footprint	9ft2in
Weight (approx)	4,225lbs
Max pressure, tracks	7.5psi
Max pressure, footplate	65.3psi
Track size (per track)	44in x 6 ¹ / ₂ in
Foot pad size (per pad)	48 ¹ / ₂ sq in
110V drive motor	Standard
Honda, iGX390	Standard
Lithium Battery	Option
Hatz diesel engine	Option

We reserve the right to alterations

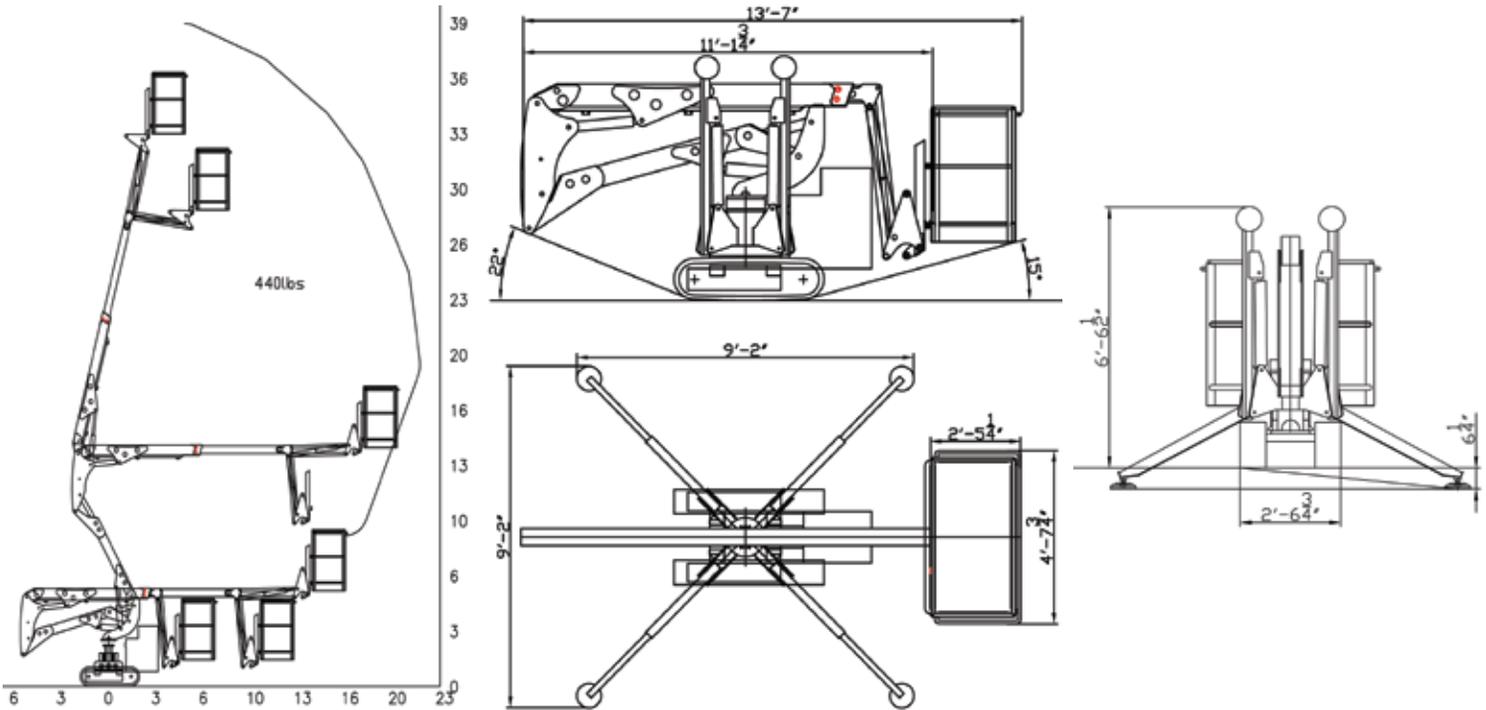

B39
BLUELIFT

Standard Equipment

- Automatic stability & outreach control
- Computer controlled (can-bus)
- Basket rotation
- Proportional control of all functions
- Self propelled
- Non marking tracks
- Air/water to the basket
- 110V emergency drive motor
- Honda iGX390 engine
- 360° non cont. turret rotation
- Manual pump for emergency lowering
- Width of only 2ft7in
- 2 person basket
- Full work height with 440lbs in basket
- Space for tools etc in basket
- 110V to the basket
- Remote control

Optional Equipment

- Radio control
- Hatz diesel engine
- Lithium Battery

Additional Specifications

Boom angle	0°/ +75°
Oil tank capacity	8gal
Max windspeed	28mph
Operating speed	0.9mph
Travel speed	0.9mph
Drive gradability	15°/28%
Set-up gradability	5°/9%



Ruthmann Reachmaster N.A. LP
Toll Free: 866-358-7088
www.ruthmannreachmaster.com