











359

BLUELIFT

ReachMaster launched the Bluelift line in North America in 2010, and since then this line of track-based compact aerial lifts has continued to set one record after another:

The first manufacturer in the world to

- offer a 72 ft. work height unit with an overall length of less than 15 ft
- feature a true hybrid option with combined lithium and combustion engine in this class of units
- offer the most narrow units in its class
- auto centering of boom, go-home features and many more operator aid functions

The latest new feature is an innovative electro-hydraulic system that will allow the operator to use two independent functions at the same time.

With working heights from 35 – 101 ft., single and double door access combined with hybrid power solutions, the Bluelift line offers an unmatched range of versatile lifts that can be used in- and outdoor. Applications such as general rental, window cleaning, building maintenance and tree care are just a few of the many tasks where the Bluelift line will offer a superior, safer and more efficient solution.

Model	B59

Working height 59ft
Platform height 53ft
Max outreach

330 lbs/basket 30ft5in 440 lbs/basket 26ft 507 lbs/basket 24ft5in

Basket dims 4ft3¾in x 2ft3½in

Basket rotation +/-90°

Turret rotation 340°/ non continuous

Standard

Option

Height 6ft6in Length (w/o basket) 12ft Length (w/ basket) 14ft4in Width (w/o basket) 2ft7in Footprint 11ft X11ft Weight (approx) 5070lbs Max pressure, tracks 8.85 psi Max pressure, footplate 83.90 psi Track size (per track) 44in X 6½in Foot pad size (per pad) 481/2sq in 110V drive motor Standard


We reserve the right to alterations


Honda, iGX390

Hatz diesel engine





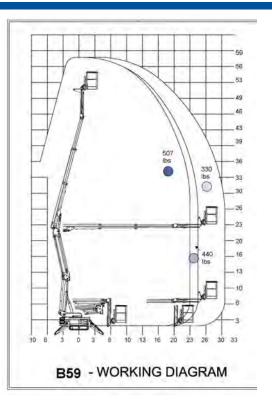

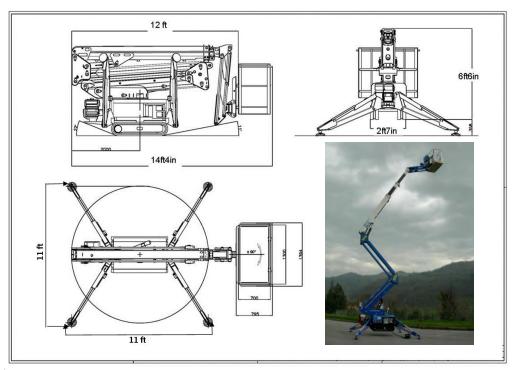

BLUELIFT B59

Standard Specifications:

Hydraulic Leveling platform with closed circuit
180° (+/-90°) basket rotation
Protection of outrigger cylinders
Non marking tracks
Self propelled
110V drive motor
Honda iGX390 engine
340° non cont. turret rotation
Manual pump for emergency lowering
Width of only 2ft7in
2 person basket

Options:

Track width adjusting system Lithium battery hybrid Diesel engine

Additional Specifications:

Jib working angle -100°/ 10°
Operating speed 0.9mph
Drive gradability 15°/28%
Set-up gradability 10°/18%







Ruthmann Reachmaster N.A.LP
Toll Free: 866-458-7088
www.ruthmannreachmaster.com